Ceramic transition profile EJOT® Pro UEP-K

UEP-K06-30/01: 8812048005

Application

Profile for forming a horizontal transition with drip edge from plaster to ceramic cladding with targeted water flow. A permanent colour coating of the profile can only be applied with a colour system approved for rigid PVC. We recommend having the choice of colour approved by a specialist company. The above-mentioned requirements (HBW and TSR) for the colour design must also be taken into account here.

Properties

Targeted drainage of water thanks to drip edge; precise and clean plaster connection thanks to bendable protective tab; flush and plumb edges thanks to rectangular plug connector

Storage and transport

lying on the entire surface; dry and frost-free; not above 50 °C; no direct sunlight

Dimensions and packaging	
Bar length [m]	2.5
Pieces / cardboard box	25
Running meter / cardboard box	62.5
Cardboard box / pallet	44
Running meter / pallet	2,750
Pallet height [m]	1.3

Basic profile	
Raw material	Rigid PVC – free from lead and cadmium – REACH compliant
Tolerances	Profile general tolerances 2A according to DIN 16941
Colour fastness	According to DIN EN 20105-A03 – compliance level 2

Mesh	
Glass fiber fabric	R131 or comparable (certified on the basis of EAD 040016-01-0404 / EAD 040083-00-0404)
Fabric grammage [g/m²]	160
Mesh size [mm]	4 x 4
Fabric colour/print	White neutral
Fabric width [cm]	12.5 ± 5 %
Fabric fastening	welded

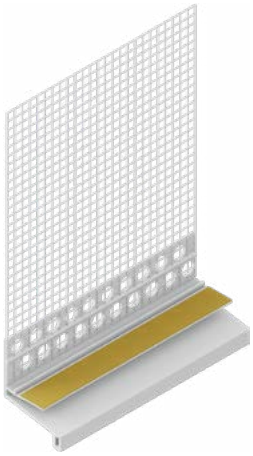

EJOT SE & Co. KG · Market Unit Construction · In der Stockwiese 35 · 57334 Bad Laasphe
T +49 2752 908-0 · F +49 2752 908-731 · construction@ejot.com · www.ejot.com/construction